




Bulkhead Female Connector

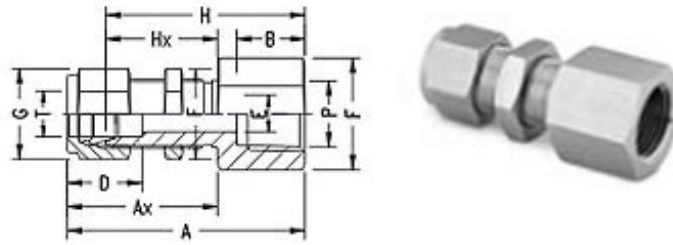

INCH OD Tubes x Female NPT Threads

T Tube OD	P NPT Male	Fluid Fit Part No.	A	Ax	B	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
1/8	1/8	2 BFC	44.7	31.2	10.4	12.7	2.4	14	11	38.1	24.6	8.3	12.7
1/4	1/4	4-2 BFC	47.0	33.5	10.4	15.3	4.8	16	14	39.7	26.2	11.5	10.2
1/8	1/4	4 BFC	51.5	33.5	15.0	15.3	4.8	19	14	44.2	26.2	11.5	10.2
3/8	1/4	6-4 BFC	54.8	36.8	15.0	16.8	7.1	19	17	47.5	29.5	14.7	11.2
1/2	3/8	8-6 BFC	61.7	41.9	15.0	22.9	10.4	22	22	51.6	31.0	19.5	12.7
1/2	1/2	8 BFC	66.7	41.9	19.8	22.9	10.4	27	22	56.6	31.0	19.5	12.7
5/8	1/2	10-8 BFC	67.6	42.7	19.8	22.9	12.7	27	25	57.4	32.5	22.6	12.7
3/4	1/2	12-8 BFC	72.4	47.5	19.8	24.4	16.0	35	28.5	62.3	37.4	25.8	16.8
3/4	3/4	12 BFC	74.7	47.5	20.6	24.4	16.0	35	28.5	64.3	37.4	25.8	16.8
1	3/4	6-12 BFC	84.3	57.4	20.6	31.2	16.0	35	38	72.1	45.2	33.7	19.0
1	1	16 BFC	93.2	57.4	25.4	31.2	22.2	35	38	81.0	45.2	33.7	119.0
1.1/4	1.1/4	20 BFC	105.7	69.9	25.4	41.2	27.6	50	50	83.5	47.7	41.6	19.0
1.1/2	1.1/2	24 BFC	144.5	76.4	27.6	50.0	34.0	60	57	87.4	49.3	49.6	19.0

Fluid Fit Engineers

Unit 11, Pereira Compound, Near Vaishali Nager, S. V. Road

Mumbai-400 102, Maharashtra (India)