




## Bulkhead Female Connector

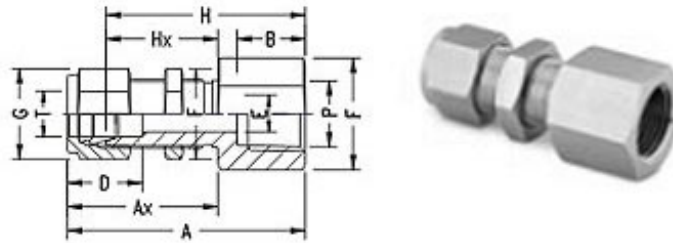

### METRIC OD Tubes x Female NPT Threads

T Tube OD	P NPT Male	Fluid Fit Part No.	A	Ax	B	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
3	1/8	3-2N BFC	44.7	31.2	10.4	12.9	2.4	14	11	38.1	24.6	8.3	12.7
6	1/4	6-4N BFC	51.6	33.6	15.0	15.3	4.8	19	14	44.2	26.2	11.5	10.2
10	3/8	10-4N BFC	56.8	37.0	15.0	17.2	7.9	22	19	49.2	29.4	16.3	11.2
12	3/8	12-6 BFC	61.8	41.9	15.0	22.8	9.5	24	22	51.7	31.8	19.5	12.7
12	1/2	12-8 BFC	66.7	41.9	19.8	22.8	9.5	27	22	56.6	31.8	19.5	12.7
16	1/2	16-8N BFC	67.5	42.6	20.6	24.4	12.7	27	25	57.4	32.5	22.8	12.7
22	3/4	22-12N BFC	79.9	53.0	20.6	26.0	15.8	35	35	69.8	42.9	29.0	19.0
25	3/4	25-12N BFC	84.3	57.4	20.6	31.2	15.8	35	38	72.1	45.2	33.7	19.0
25	1	25-12N BFC	93.2	57.4	25.4	31.2	22.3	35	38	81.0	45.2	33.7	19.0
32	1.1/4	32-20N BFC	105.7	69.9	25.4	42.0	27.6	50	50	83.5	44.7	41.6	19.0
38	1.1/2	38-24N BFC	114.5	76.4	27.6	49.4	33.7	60	57	87.4	49.3	49.6	19.0

## Fluid Fit Engineers

Unit 11, Pereira Compound, Near Vaishali Nager, S. V. Road

Mumbai-400 102, Maharashtra (India)